




# PENDU STACKER-NOTCHER

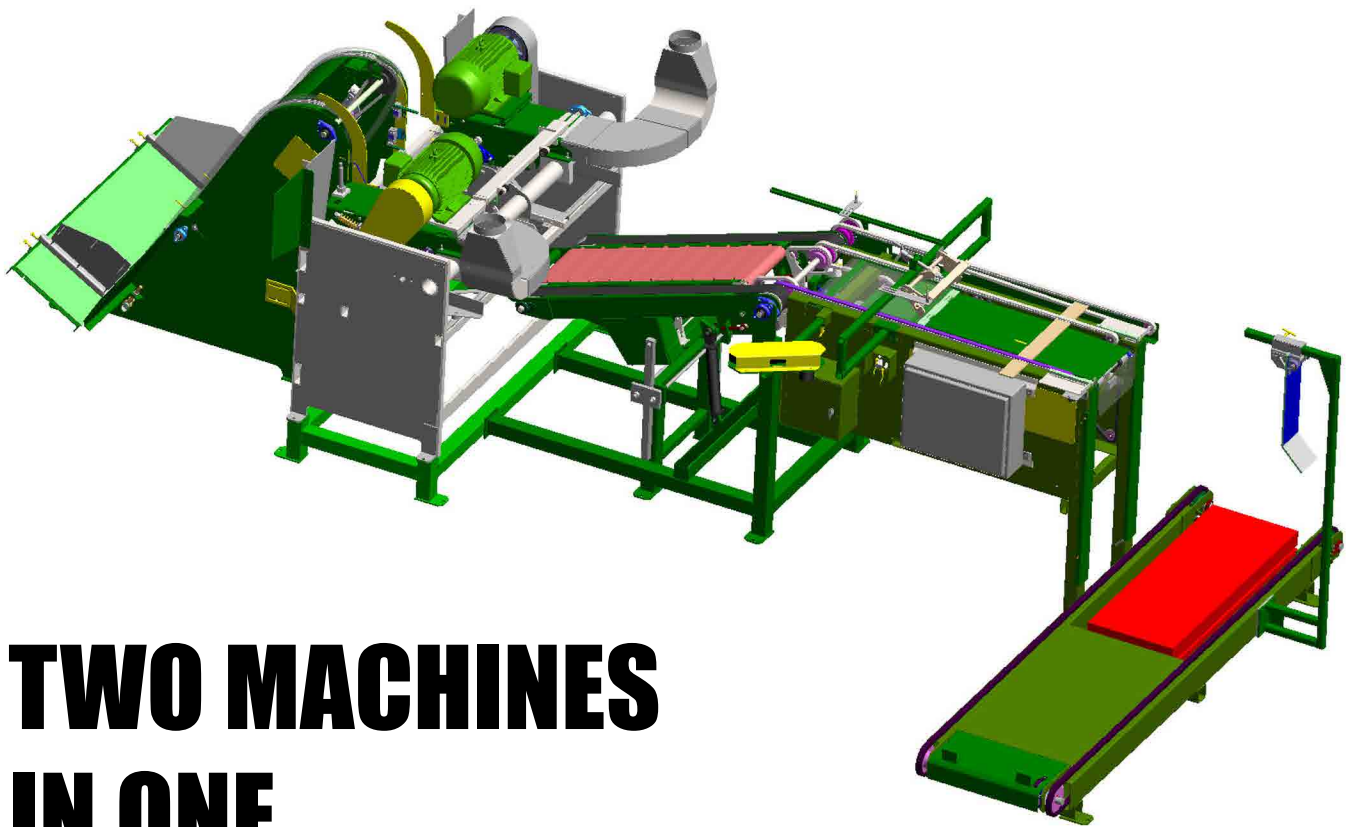

## TWO MACHINES IN ONE

The Pendu Stacker-Notcher combination machine provides the versatility to be able to notch stringer boards and send them straight into the stacking mechanism, or raise the conveyors to bypass the notcher when you just want to stack boards. Notch up to 4000 stringers per hour and stack up to 12 layers per minute. The notcher handles boards from 36" to 72" long, and the stacker handles boards of 28" to 72" in length.

### Stacker Specifications

Stack Rate	Up to 9,000 boards per hr.
Stack Size	Up to 48" W x 50" H x 72" L
Stack Lengths	28" to 72"
Board Sizes	1/2" x 3 1/2" to 2" x 6"
Motors	Hydraulic Powered
Mode	Automatic or Manual
Speed	Variable Speed Feed

### Notcher Specifications

Material Capacity	1" x 3.5" up to 2" x 4"
Material Lengths	36" to 72"
Cutters	9" wide notch
Dist. Between Notches	6" to 36"
Notch Depth	Up to 2.5"
Cutter Head Diameter	12" indexible carbide tips
Arbors	Cantilevered - 2.25 diam.
Cutter Head Motors	Two 40HP TEFC motors



718 North Shirk Road • New Holland, PA 17557 • 800-233-0471 • [www.Pendu.com](http://www.Pendu.com)

© 2013 Pendu Manufacturing, Inc.